



YK BX-A/K10DE型


低碳冷轧钢单相10表位电子电表箱

建议配置

型号	YK BX-A/K10DE	
配置	规格	数量
总	YCM1-225L/3300 160A	1
进	FJ6G-250/16-50/3×16	2
	FJ6G-250/16-50/4×16	1
出	FJ6G-250/16-50/12×10	1
	DZ47-60/2P C40A	10

外形及安装尺寸

YK BX-A/K10DE

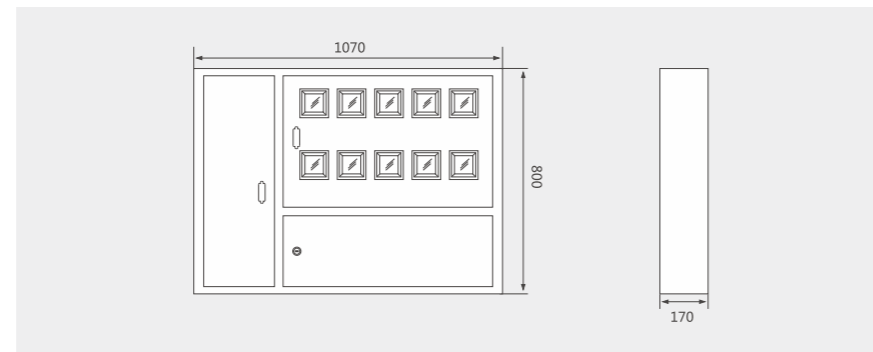

YK BX-A/K12DE型


低碳冷轧钢单相主控12表位电子电表箱

建议配置

型号	YK BX-A/K12DE	
配置	规格	数量
总	YCM1-225L/4300 225A	1
进	FJ6G-250/16-50/4×16	3
	FJ6G-250/16-50/12×10	1
出	DZ47-60/2P C40A	12

外形及安装尺寸

YK BX-A/K12DE

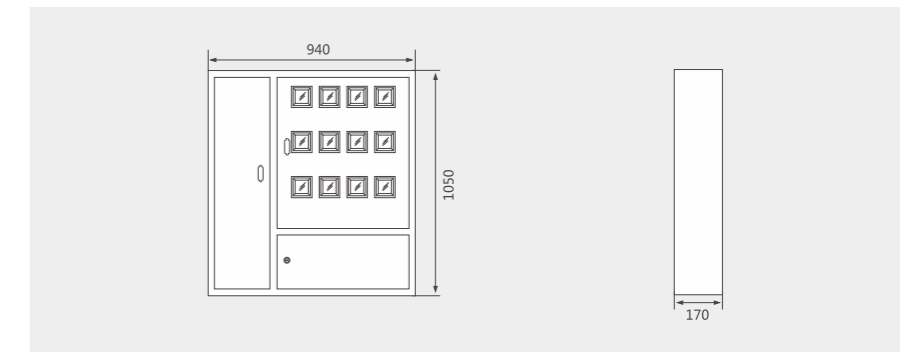

YK BX-A/K12DE型


低碳冷轧钢单相主控12表位电子电表箱

建议配置

型号	YK BX-A/K12DE	
配置	规格	数量
总	YCM1-225L/3300 225A	1
进	FJ6G-250/16-50/4×16	3
	FJ6G-250/16-50/12×10	1
出	DZ47-60/2P 32A	12

外形及安装尺寸

YK BX-A/K12DE

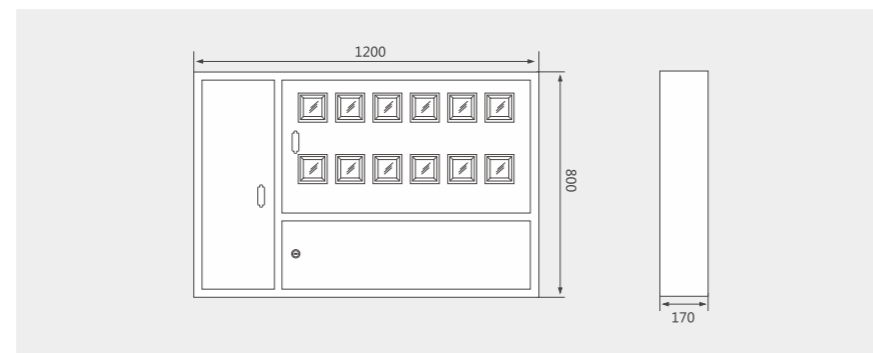

YK BX-A/K16DG型

低碳冷轧钢单相主控16表位国网智能标电表箱

建议配置

型号	YK BX-A/K16DG	
配置	规格	数量
总	YCM1-225L/3300 225A	1
进	FJ6G-250/16-50/6×16	3
	FJ6G-250/16-50/8×10	1
出	FJ6G/JHD-1/a	8
	DZ47-60/2P 32A	16

外形及安装尺寸

YK BX-A/K16DG

